



HORSEWALKER


BELMONDO® Horsewalker

**Electrically conductive
Improved wet slip resistance
With UV and ozone protection**

- suitable for every horsewalker
- requirement: hard/paved floor (concrete, asphalt, ...)
- tailor-made production
- protects the musculoskeletal system
- weatherproof and frostproof
- very durable with every type of shoe
- suitable for vehicle traffic*



PRÜFNUMMER
201501007

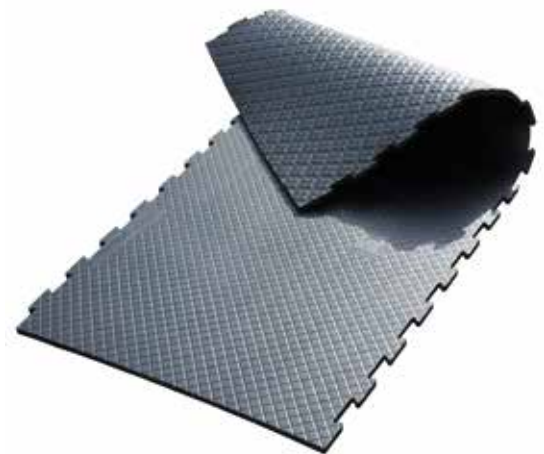

Surface: rhombic profile with wear resistant top coat
Lower side: multisquare profile (3 mm)
Material: rubber
Thickness: 21 mm **NEW!**
Dimensions: individually tailor-made



For every type of shoe.



rhombic profile with top coat



multisquare profile on lower side

* can be driven on with standard equipment such as farm yard loader or tractor with authorized pneumatic tyres at the recommended inflation pressure up to max. 4 bar. (Notice: drive with due care and steer in large radius!)



Laying: according to BELMONDO® laying instructions

Tolerances: thickness: +3/-2 mm
length/width: +/- 1.5 % (DIN ISO 3302-1 tolerance class M4)
The tolerances also apply within the mat.

The products presented here should only be used for the listed applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Legal basis is the German version of the document.